




# JiangSu Kintep Environmental Protection Equipment Co.,Ltd.

Website: www.kintep.net Tel: +86 523 89988802 Fax: +86 523 88638888  
 Add: No.66 Wuliangsi Road, Sixiang Town, Medical High-tech Zone, Taizhou, Jiangsu, China

## Specification

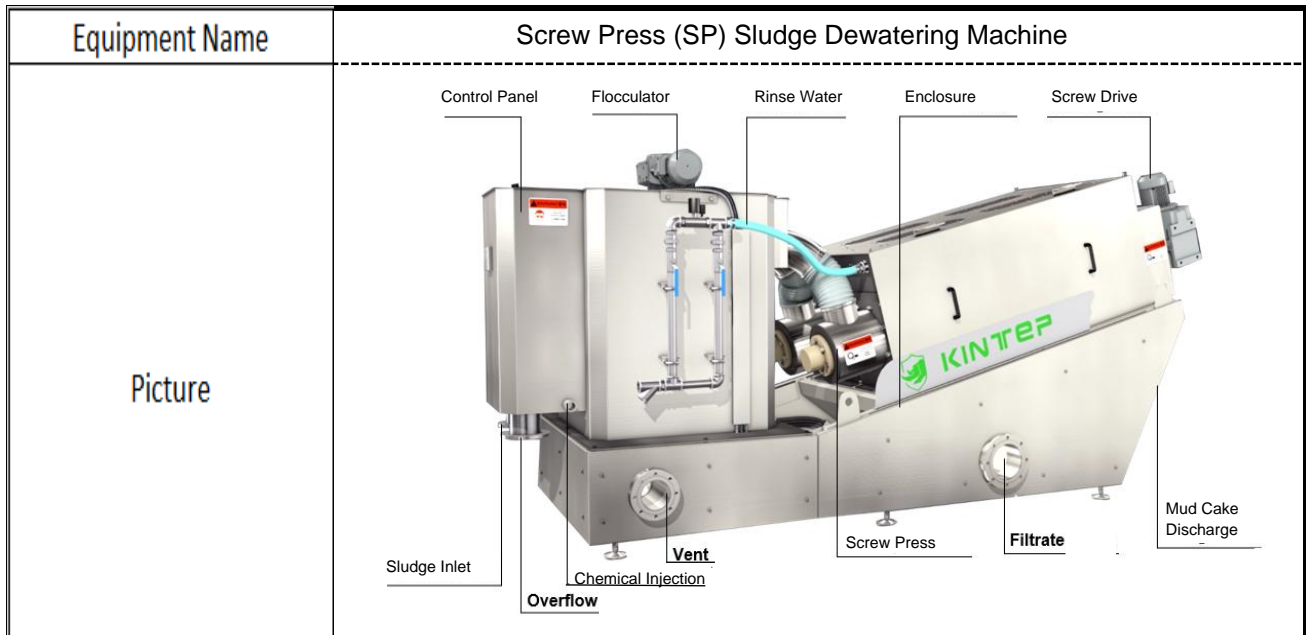

Model	KTDL 251
Dewatering Type	Screw Press
Production Capacity (kg.dried sludge/hour)	15-30kg.DS/h
Equipment Dimensions	L2690mm x W880mm x H1600mm
Net Weight	500kg
Operation Weight	805kg
Power	0.92kw
Inlet Flow- Sludge Content	1.5m <sup>3</sup> /h-10,000mg/L 0.6m <sup>3</sup> /h-50,000mg/L
Mud Cake Moisture	Approx. 80%
Working Hours	Automatically operating 24 hours per day
Maintenance Frequency	10 min/day

Specification	Item	Parameter
Material	Enclosure	304SS
	Screw Shaft	304SS
	Water Collection Shaft	304SS
	Flocculation Tank	304SS
	Spray System	304SS
	Solenoid Valve	304SS
	Liquid Level Switch	304SS



## JiangSu Kintep Environmental Protection Equipment Co.,Ltd.

Website: www.kintep.net Tel: +86 523 89988802 Fax: +86 523 88638888  
 Add: No.66 Wuliangsi Road, Sixiang Town, Medical High-tech Zone, Taizhou, Jiangsu, China

### Specification

Screw Shaft	Diameter x Length	200mm dia x 1700mm
	Qty	1 piece
	Process	Fine machined, supersonic spray finish with reinforced blade
	Hardness	1100HV
Ring	Thickening Zone Rings	2.85±0.2mm (cold rolling)
	Dewatering Zone Rings	2.85±0.2mm (cold rolling)
	Washer	Thickening Zone: 3.30±0.2mm (fine machined) Dewatering Zone: 3.15±0.2mm (fine machined)
Water Collection Basin	Dimensions	1160mm x 510mm x 320mm
	Filtrate Discharge	DN125 flange (PN1.6MPa)
Flocculation Tank	Dimensions	450mm x 450mm x 750mm
	Qty	1 set
	Volume	0.15 m <sup>3</sup>
	Stiring Device	1 set, 304SS
	Sludge Inlet	DN40 male NPT
	Overflow Nozzle	DN80 flange (PN1.6MPa)
	Chemical Injection Nozzle	DN15 male NPT
	Vent	DN50 female NPT
Enclosure	Dimensions	2240mm x 850mm x 740mm
	Qty	1 set
Screw Drive	Power	0.55kw
	IP Grade	IP55
	Insulation Grade	F
	Rotating Speed	2.28-5.7rpm
	Reduction Ratio	246
	Qty	1 set
	Brand	TBA
Flocculator Motor	Power	0.37kw
	IP Grade	IP55
	Insulation Grade	F
	Rotating Speed	30rpm
	Reduction Ratio	48.17
	Qty	1 set
	Brand	TBA



## JiangSu Kintep Environmental Protection Equipment Co.,Ltd.

Website: www.kintep.net Tel: +86 523 89988802 Fax: +86 523 88638888

Add: No.66 Wuliangsi Road, Sixiang Town, Medical High-tech Zone, Taizhou, Jiangsu, China

### Specification

Spray System	Type	Cone water column
	Pressure	0.2MPa
	Water Consumption	58L/h
	Rinse Water Inlet Size	DN15 female NPT
	Spay Nozzle	8 pieces, 304SS
	Spray Pipe	DN15, 304SS
Solenoid Valve	Pipe Size	DN15
	Qty	1 set
	IP Grade	IP65
	Brand	TBA
Liquid Level Switch	Model	PS-3SC
	Size	60mm dia
	Brand	Omron
Electric Control Cabinet	Materials	Epoxy coated carbon steel
	Electrical Components	Schneider
	Frequency Converter	Schneider/Delta
	PLC	Siemens/VIPA