




JiangSu Kintep Environmental Protection Equipment Co.,Ltd.

Website: www.kintep.net Tel: +86 523 89988802 Fax: +86 523 88638888
 Add: No.66 Wuliangsi Road, Sixiang Town, Medical High-tech Zone, Taizhou, Jiangsu, China

Specification

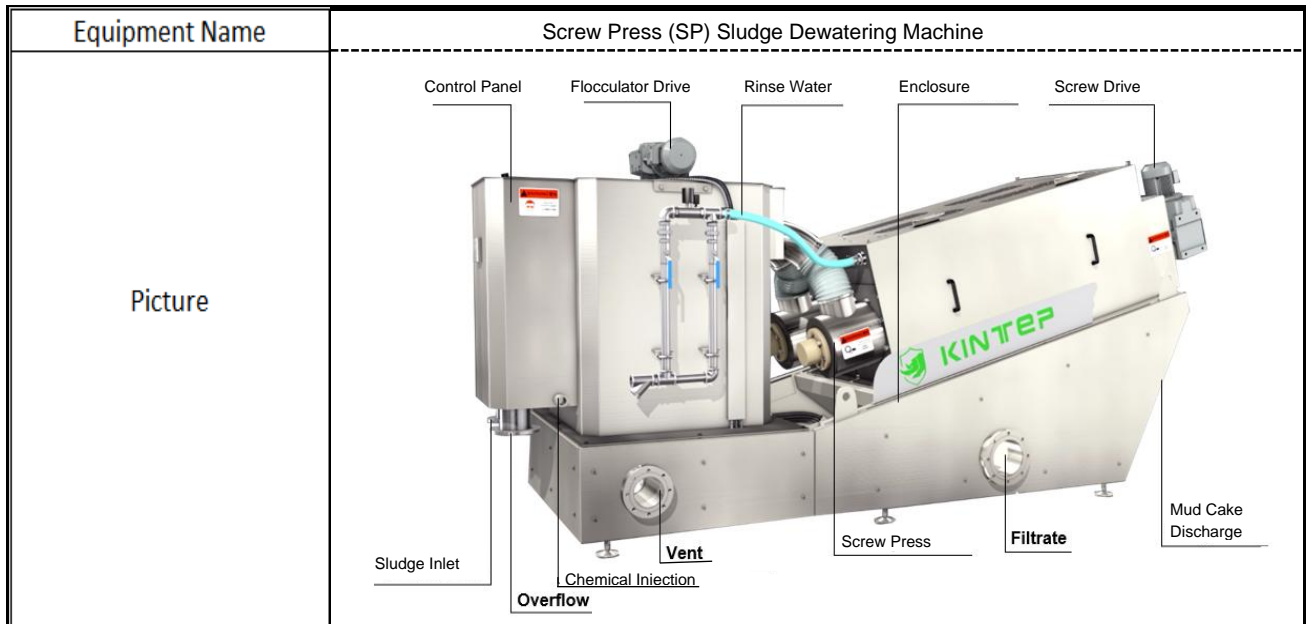

Model	KTDL 351
Dewatering Type	Screw Press
Production Capacity (kg.dried sludge/hour)	50-100kg.DS/h
Equipment Dimensions	L3610mm x W1100mm x H1850mm
Net Weight	1150kg
Operation Weight	1915kg
Power	1.85kw
Inlet Flow- Sludge Content	5.0m ³ /h-10,000mg/L 2.0m ³ /h-50,000mg/L
Mud Cake Moisture	Approx. 80%
Working Hours	Automatically operating 24 hours per day
Maintenance Frequency	10 min/day

Specification	Item	Parameter
Material	Enclosure	304SS
	Screw Shaft	304SS
	Water Collection Shaft	304SS
	Flocculation Tank	304SS
	Spray System	304SS
	Solenoid Valve	304SS
	Liquid Level Switch	304SS



JiangSu Kintep Environmental Protection Equipment Co.,Ltd.

Website: www.kintep.net Tel: +86 523 89988802 Fax: +86 523 88638888
 Add: No.66 Wuliangsi Road, Sixiang Town, Medical High-tech Zone, Taizhou, Jiangsu, China

Specification

Screw Shaft	Diameter x Length	300mm dia x 2411mm
	Qty	1 piece
	Process	Fine machined, supersonic spray finish with reinforced blade
	Hardness	1300HV
Ring	Thickening Zone Rings	2.85±0.2mm (cold rolling)
	Dewatering Zone Rings	2.85±0.2mm (cold rolling)
	Washer	Thickening Zone: 3.30±0.2mm (fine machined) Dewatering Zone: 3.15±0.2mm (fine machined)
Water Collection Basin	Dimensions	1670mm x 690mm x 440mm
	Filtrate Discharge	DN200 flange (PN1.6MPa)
Flocculation Tank	Dimensions	630mm x 630mm x1040mm
	Qty	1 set
	Volume	0.4 m ³
	Stiring Device	1 set, 304SS
	Sludge Inlet	DN50 male NPT
	Overflow Nozzle	DN100 flange (PN1.6MPa)
	Chemical Injection Nozzle	DN20 male NPT
	Vent	DN50 female NPT
Enclosure	Dimensions	3070mm x 1070mm x 1025mm
	Qty	1 set
Screw Drive	Power	1.1kw
	IP Grade	IP55
	Insulation Grade	F
	Rotating Speed	1.96-4.9rpm
	Reduction Ratio	288
	Qty	1 set
	Brand	TBA



JiangSu Kintep Environmental Protection Equipment Co.,Ltd.

Website: www.kintep.net Tel: +86 523 89988802 Fax: +86 523 88638888
Add: No.66 Wuliangsi Road, Sixiang Town, Medical High-tech Zone, Taizhou, Jiangsu, China

Specification

Flocculator Motor	Power	0.75kw
	IP Grade	IP55
	Insulation Grade	F
	Rotating Speed	31rpm
	Reduction Ratio	46.4
	Qty	1 set
	Brand	TBA
Spray System	Type	Cone water column
	Pressure	0.2-0.4MPa
	Water Consumption	126L/h
	Rinse Water Inlet Size	DN32 female NPT
	Spay Nozzle	6 pieces, 304SS
	Spray Pipe	DN32, 304SS
Solenoid Valve	Pipe Size	DN32
	Qty	1 set
	IP Grade	IP65
	Brand	TBA
Liquid Level Switch	Model	PS-3SC
	Size	60mm dia
	Brand	Omron
Electric Control Cabinet	Materials	Epoxy coated carbon steel
	Electrical Components	Schneider
	Frequency Converter	Schneider/Delta
	PLC	Siemens/VIPA